

SHOP SMART. SHOP VALUE SHOP differently






E&E LED CLASSIC BOX EXIT BODY ONLY - WALL / CEILING DIFFUSER

PRODUCT RANGE				
CODE	DESCRIPTION	Carton Qty		
CS-EXBOXL	E&E LED Classic Box Exit Body Only	5 pieces		
CS-DBOXW	E&E Wall Diffuser to suit EXBOXL	5 pieces		
CS-DBOXC	E&E Ceiling Diffuser to suit EXBOXL	5 pieces		

LED Classic Box Exit Body Only



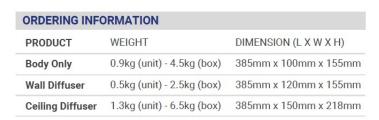



Wall Diffuser

Ceiling Diffuser



TECHNICAL SPECIFICATIONS						
Operating Mode	Switch Maintained					
Voltage (V); Frequency (Hz)	220-260V; 50Hz					
Operating Temperature	1° - 45° C					
IP Rating	IP20					
Wiring	Large Terminal Block					
Mountain Type	Wall or Ceiling Surface Mount					
Testing System	Manual Test Switch					
Construction	Polycarbonate Body and Diffuser					
Classification	C0 D6.3 C90 D4 (Wall)					
	C0 D10 C90 D8 (Ceiling)					
Standards	AS/NZ 2293					
	AS/NZS 60598.1					

EMC

BATTERY AND LEDS	
Battery	High-Temp LiFePO4 Lithium Battery
Power Consumption	3W
Charging Method	3 Stage Intelligence
Charging Time	16 Hours
Lens	LED Lamp Rated 50,000 hours
Viewing Distance	24 Metres

REPLACEMENT PAR	DESCRIPTION			
PART NUMBER	DESCRIPTION			
BBOXL	LiFePO4 Lithium Battery, 3.2V 3200mAh			

SPACING TABLE AND MOUNTING HEIGHT										
CLASSIFICATION	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	
D4	7.1	7.2	7.3	7.3	7.2	7.1	6.9	0.0	0.0	
D6.3	8.5	8.8	8.9	9.1	9.1	9.2	9.1	9.0	8.7	
D8	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	
D10	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	

