


LiteLighting 10W PC Downlight Tricolour 90mm

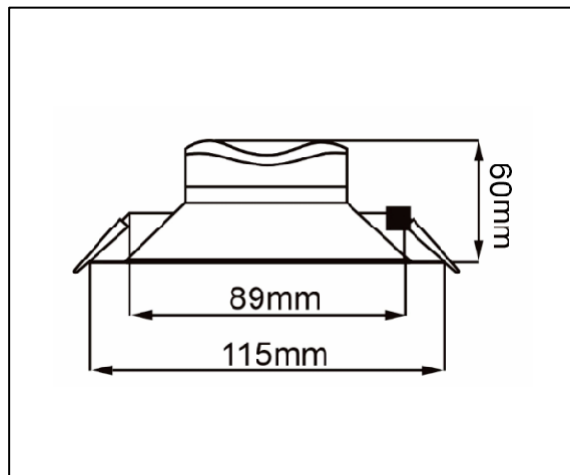

MODEL	LL-FDL2-P9010D-CCT	HOUSING COLOUR	WHITE
INPUT VOLTAGE (V)	AC 220-240V	MATERIAL	Conduction material + aluminum
PROTECTION CALSS	II	IP	44
IC RATED	IC-4	OPERATING TEMPERATURE (° C)	-20°C to +45°C
SPD (KV)	1.5	DIMMABLE (Y/N)	YES
POWER FACTOR (PF)	0.9	DIMMING TYPE	TRIAC DIMMING
WATTAGE (W)	10	INSTALLATION TYPE	RECESSED
LUMEN OUTPUT (LM)	800-950	CUT-OUT (mm)	Φ90
EFFICACY (LM/W)	80-95	DIMENSION (mm)	Φ115*60
COLOUR TEMPERATURE (K)	Tricolour: 3000-4000-6000	NET WEIGHT (kg)	0.2
BEAM ANGLE (°)	100	LIFESPAN (hr.) @L70B50	50,000
CRI (Ra)	>80	WARRANTY (yr.)	3
SDCM	<5	Compliance	SAA, RCM, SDoC