


# **SHOP SMART. SHOP VALUE** SHOP differently





# LAE 3.2W Solar LED Wall Light With PIR Sensor 6000K



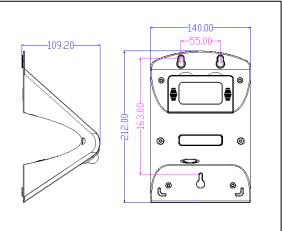

MODEL	CS-LAE- SWL-3.2W-6000K	SENSOR DETECTION AREA	120° /≤6M
BATTERY	2000mAH/3.7V Li-ion	HOUSING COLOUR	BLACK
PROTECTION CALSS	Ш	MATERIAL	PC+ABS+ALU
SOLAR PANEL	2.3Wp Poly- crystalline silicon	WORKING MODE	A: keep 20% brightness B: Bright & Dim C: On & off
CHARGING TIME(Hours)	5-6	OPERATING TEMPERATURE (° C)	-15 <b>°C</b> to +50 <b>°C</b>
WATTAGE (W)	3.2	ELECTRICITY COST	0
FLICKER FREE (Y/N)	Υ	IP	65
LUMEN OUTPUT (LM)	384	INSTALLATION HEIGHT(m)	2-4
EFFICACY (LM/W)	120	DIMENSION (mm)	212*140*109.2
COLOUR TEMPERATURE (K)	6000	NET WEIGHT (kg)	0.48
BEAM ANGLE (°)	90	LIFESPAN (hr.) @L70B50	35,000
CRI (Ra)	80	WARRANTY (yr.)	2





# SHOP SMART. SHOP VALUE SHOP differently






## Pls press the Swicth to adjust working mode:

Press 1st time, it's Mode A. Press 2nd time, it's Mode B. Press 3rd time, it's Mode C. Press 4th time, it's off.

# **3 Working Modes**

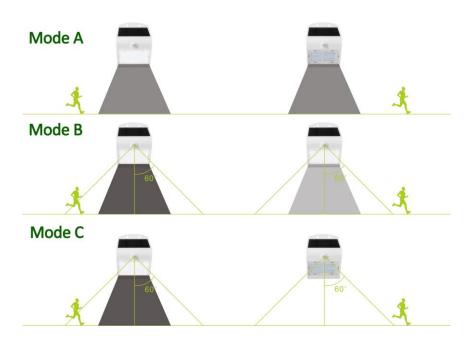

## 3 selectable working modes for different environment requirement.

### **MODE A**

Automatically turns on at the dusk (<30 lux) and remains 20% bright, up to 5 hours after which it turns off.

#### **MODE B**

Automatically turns on to full brightness (400lm) when motion is detected in the range  $\leq$ 6 mtrs and then turns to 3% brightness in 20 seconds of no motion.

#### **MODE C**

Automatically turns on to full brightness (400lm) when motion is detected in the range  $\leq$ 6 mtrs and then turns off in 30 seconds of no motion.