



OVER 8000 SPARKIES
HAVE MADE THE SWITCH



Matrix CAT6 RJ45 24 Keystone Ports Black CS-TE-PP246-K-BLK



FEATURES

Electrical:

1. Voltage Rating :125VAC RMS
2. Current Rating :1.5 AMP
3. Contact Resistance :100 MILLIOHMS MAX
4. Insulation Resistance :1000MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz, 1MIN
6. Conform to ANSI/TIA/EIA-568 B.2-1
7. Mates with modular plug Conforming to FCC Part 68


Environmental:

1. Storage :-40° TO +85°
2. Operation :0° TO 70°

Mechanical:

1. Housing Material :PBT+15%GF UL94V-0
2. Panel Frame :Carbon Steel, Powder Coating in Black Color
3. Contact Material :PC UL94V-0 Contact: Phosphor Bronze with Nickel
4. RJ45 Jack Life : 750 Times MIN
5. IDC Life :200 Times MIN
6. WIRE :AWG 24~26
7. Terminal Contact TYPE :KRONE

TECHNICAL DRAWING

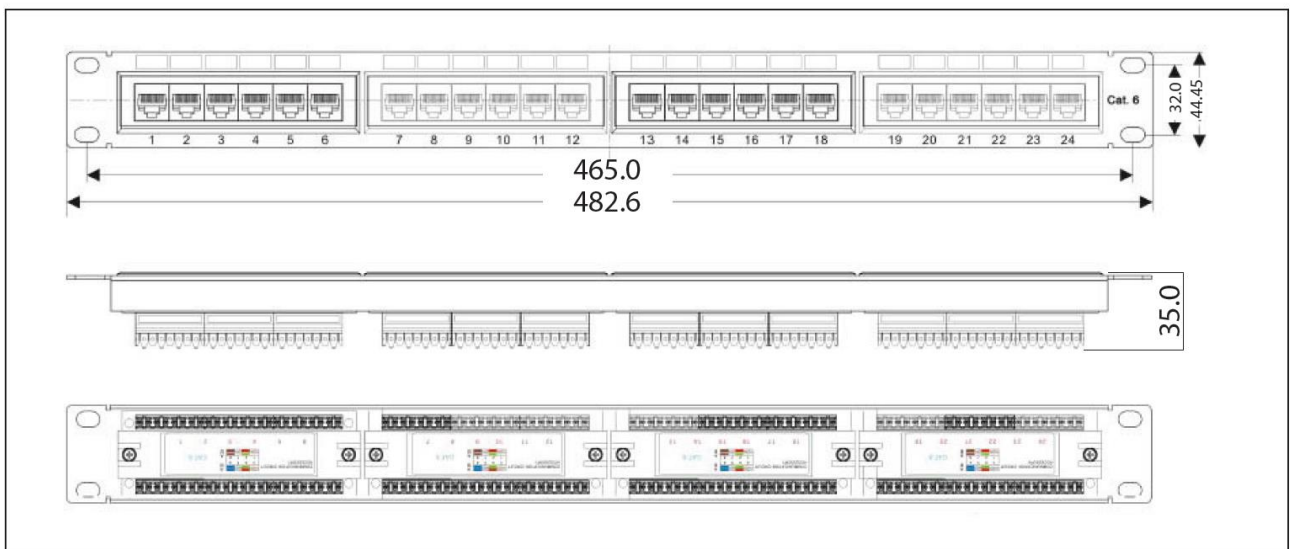

MEMBERS OF



MOORABBIN
131-133 Keys Road,
Moerabbin VIC 3189

ALTONA
1 Drake Boulevard,
Altona VIC 3018

ALBION
35 Sandgate Road,
Albion QLD 4010

sales@jh.market
www.jh.market

Victoria: 1300 000 808
Queensland: 1300 808 767

Yiyun Corporation Pty Ltd | ABN 39 074 449 988 | All information provided in this catalogue is subject to change at business discretion. Please contact the office for confirmation of pricing and stock availability at the time of order.