




OVER 8000 SPARKIES
HAVE MADE THE SWITCH



SAT4SPPFS BC15484S

Selected Hills splitters are suitable for free to air Antenna and approved for PAY TV Satellite installs, depending on the frequency range.

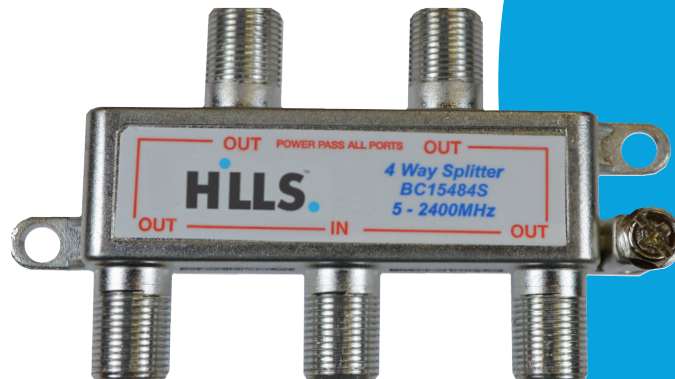

Key features

- Zinc die cast housing for mounting robustness and improved shielding
- F-Type connection for reliable use

Specifications

ITEM	FREQUENCY (MHz)	TYPICAL (dB)	Q.C. LIMIT (dB)
INSERTION LOSS (MAX.)	5-40	7.5	7.8
	40-950	8.0	8.2
	950-1450	8.5	8.8
	1450-2150	10	10.5
	2150-2400	11.5	12
ISOLATION. (MIN.)	5-40	25	22
	40-950	28	25
	950-1450	25	22
	1450-2150	22	20
	2150-2400	20	15
RETURN LOSS IN (MIN.)	5-40	14	12
	40-950	16	14
	950-1450	18	16
	1450-2150	18	16
	2150-2400	12	10
RETURN LOSS OUT (MIN.)	5-40	8	6
	40-950	16	14
	950-1450	18	15
	1450-2150	13	11
	2150-2400	13	11
DC PASS	IN-OUT	NO	
	OUT-OUT	NO	
	OUT-IN	YES	

FOXTEL APPROVAL NUMBER F30092



MEMBERS OF



Lighting Council
AUSTRALIA MEMBER

MOORABBIN
131-133 Keys Road,
Moorabbin VIC 3189

ALTONA
1 Drake Boulevard,
Altona VIC 3018

ALBION
35 Sandgate Road,
Albion QLD 4010

sales@jh.market
www.jh.market

Victoria: 1300 000 808
Queensland: 1300 000 707

Yiyun Corporation Pty Ltd | ABN 39 074 449 988 | All information provided in this catalogue is subject to change at business discretion. Please contact the office for confirmation of pricing and stock availability at the time of order.